



Solar Water Pump



Features



- Dim light operation
- No orientation limitation
- Integrated PV inverter
- 30-300 VDC
- 90-240 VAC
- High starting torque
- MPPT (Max. Power Point Tracking)

Integrated protection against:

- Polarity mistakes
- Overtemperature
- Over- and undervoltage
- Overload
- Dry-running

30M Water Pump (IP68 enclosure)



Quantity \ PV panel	150W x 3	150W x 6	150W x 9
30m Head (Liters / Hour)	1,000	4,200	7,000
10m Head (Liters / Hour)	7,000	11,200	13,500

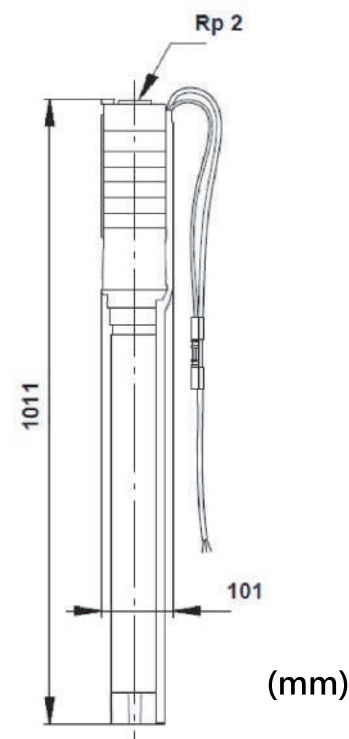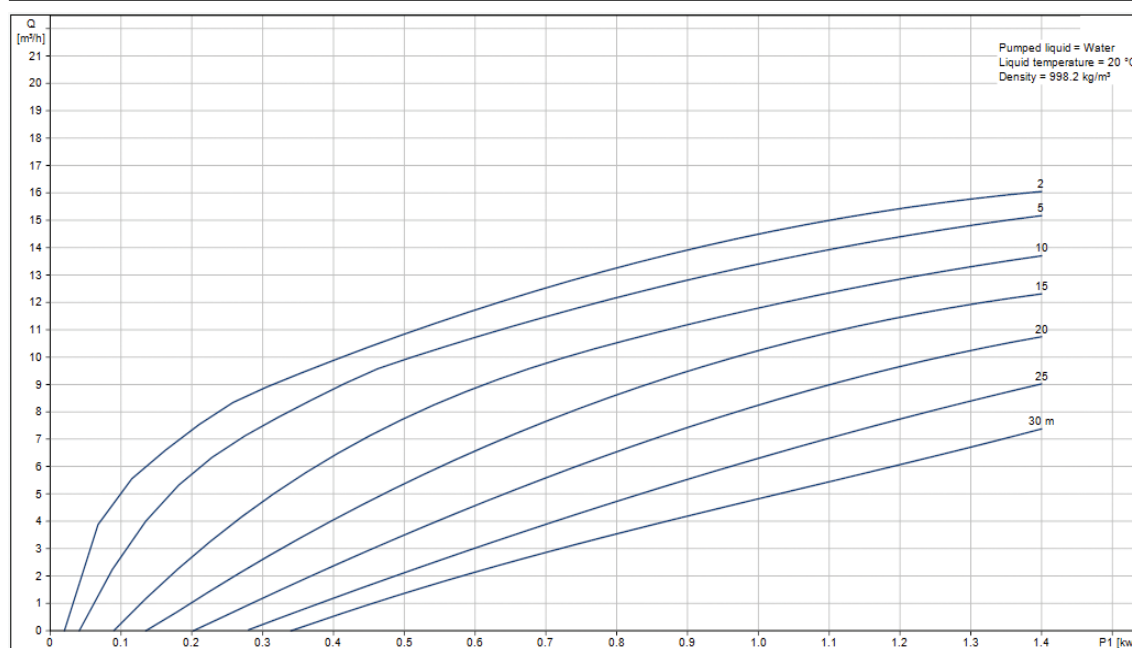

Pump packing dimension:
140 x 36 x 34 cm (40Kg)

250M Water Pump (IP68 enclosure)

Quantity \ PV panel	150W x 3	150W x 6	150W x 9
250m Head (Liters / Hour)	-	520	1,050
150m Head (Liters / Hour)	600	1,200	1,200

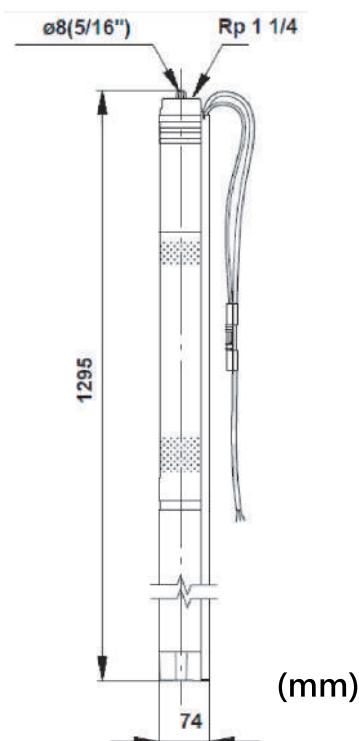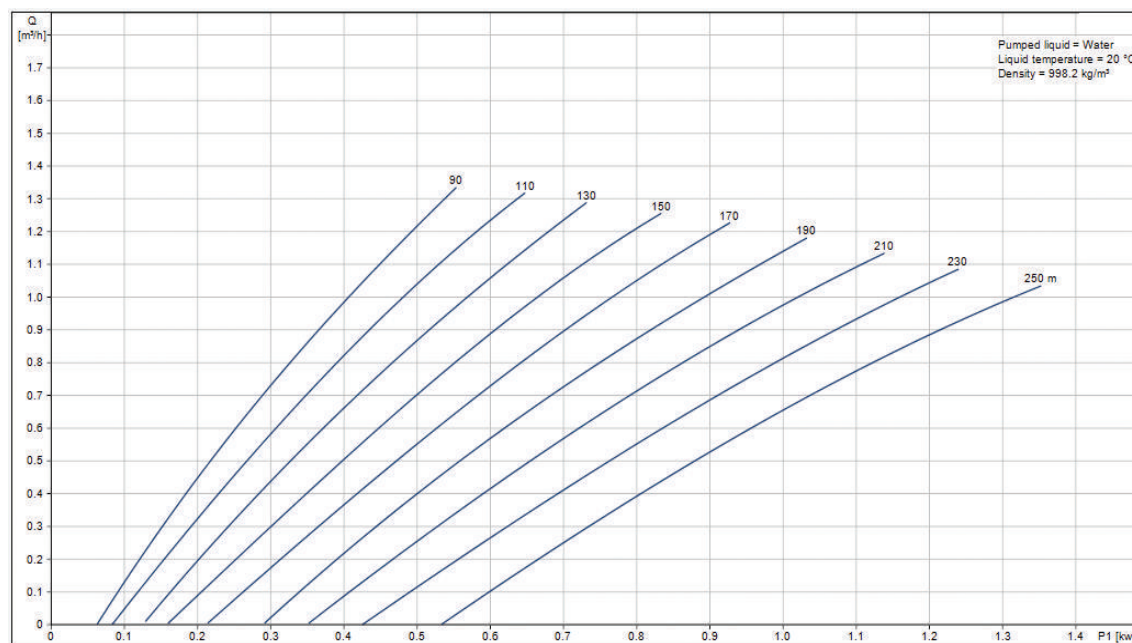

Pump packing dimension:
140 x 36 x 34 cm (40Kg)

Sunshine PV Corp.

TEL : +886-3-527-6899

FAX : +886-3-527-6877

E-mail : sales@sunshine-pv.com

No 16-1 Guangfu N Rd, Hsinchu Ind Park, Taiwan, 30351 R.O.C.

新能光電科技股份有限公司

電話 : 03-527-6899

傳真 : 03-527-6877

E-mail : sales@sunshine-pv.com

30351新竹縣湖口鄉新竹工業區光復北路16-1號